


100 Watt LED Light - 9000 lumens - 9-48 Volts DC - Adjustable Surface Mount

Part #: LED10W-10R

**Buy American Compliant**

The Magnalight LED10W-10R LED Light Bar offers high light output from a light weight/low profile, durable and water tight fixture. This IP67 rated LED light bar is designed with low profile hinge mounts that allow 180 degrees of angle adjustment and produces 9,000 lumens of LED light while drawing only 8.3 amps on 12 volts. This light can run on any voltage from 9 to 48 volts and provides a durable and powerful lighting solution ideal for use industrial and commercial applications such as machine vision system lighting, security illumination, law enforcement and vehicle lighting.

The LED10W-10R LED light bar from Magnalight produces a 9,000 lumens of bright light while drawing only 100 watts @8.3amps from a 12 volt electrical system. Ten Seoul Z-Power, 10 watt LEDs producing a maximum of 900 lumens each are arranged in rows and paired with 10 degree optics to produce a well focused spot beam measuring 1100' long by 185' in width.. We also offer optional floodlight versions with 35 degree optics to produce a much shorter and wider beam with more light concentrated closer to the fixture. These LED light bars are IP67 rated and waterproof to 1 meter, sealed against intrusion by dust and dirt and constructed to withstand the demanding conditions found in marine environments.

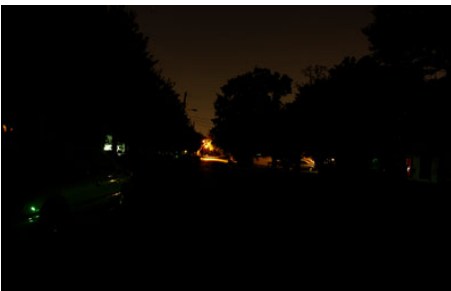

Dark street without any illumination but distant street lights

[Click Photo to Enlarge](#)



Same street illuminated by the LED10W-10R, easily reaching the street lights 1100' away


[Click Photo to Enlarge](#)

Heat Management: Heat is the single largest factor in premature LED failure and color shifting. As a result, many manufacturers reduce the output of their LEDs to reduce the amount of heat produced. These LED light bars utilize an extruded aluminum housing that incorporates an advanced heat radiating fin design which dissipates heat efficiently to produce the maximum amount of power and longevity from the integrated Seoul Z-Power 10 watt LEDs. The end result is more light and longer LED life with higher average lumen maintenance after 50,000 hours.

Voltage Control: These units contain an internal voltage regulator which allows them to adjust input current to provide the correct LED voltage levels regardless of input levels from 9 to 50 VDC. These LED10W series light bars can operate on current ranging from 9 to 50VDC without any modifications necessary as a result. This multi-voltage capability makes these units ideal for mobile and stand alone applications such as those found on boats and vehicles where power systems don't always operate with 12 volts and external generators, transformers or inverters are impractical.

**LED10W-10R 35° Flood Beam
(Std)**

**LED10W-10R 10° Spot Beam
(Opt)**

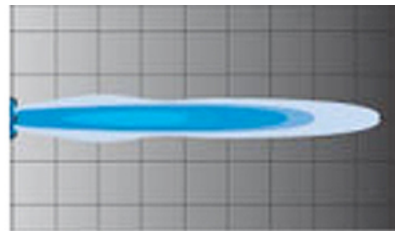

Durability: The LED10W series of LED light bars from Magnalight offer IP67 rated construction that is designed to withstand demanding marine operating conditions. These LED lights are designed for low profile mounting options, allowing them to be used in spaces where room is at a premium. They offer extruded aluminum housings and polycarbonate lenses that provide good durability yet are slimmer and lighter than extreme duty LEDLB-E series lights. These units can operate in temperatures ranging from -40 degrees Celsius to 80 degrees Celsius, are waterproof to 1 meter and are sealed against the ingress of dust, dirt and humidity. The Seoul P7 10 LEDs offer inherent LED resistance to shocks and vibrations, contributing to these unit's 8.6G rating of vibration tolerance.

Mounting: These LED light bars incorporate a hinge style mounting bracket design that provides 180 degrees of adjustability and allows the operator to attach one portion of the hinge bracket to the mounting surface first. The operator can then set the desired angle and attach the upper portion of the hinge style mount to the light. The operator then adjusts and tightens the hinge bolt to lock the light bar into position once the desired angle is set.

Note: Most Magnalight LEDLB, LEDP3W, LEDP10W, and LED10W series LED spotlights and floodlights are terminated with a Deutsch IPD / LADD DT04-2P connector. The mating connector plug is DT06-2S. Most LEDLB and LED10W series lights ship with mating connector as part of a harness or pigtail, depending on the model. Some larger LED lights like the LEDLB-160X2 or LEDLB-200X2 or multiple function LED lights (i.e. high/low beam, modulating, IR/Visible combos) will have different Deutsch connectors.

On this particular unit there is a one foot pigtail attached to the LED light terminating in a 2 pin Deutsch plug. A wiring harness attaches to the Deutsch socket on the back of the LED light. The harness is terminated in a 2 pin Deutsch plug and includes 20 feet of cable, a relay and a toggle switch that will operate on 12 or 24 volts. The wiring harness is not necessary to installation. Operators can use existing wiring and switches, assuming they are rated for the amperage listed below.

Specifications / Additional Information**LED10W-10R LED Light Bar****LEDs:** Seoul Z-Power 10 Watt LEDs**Dimensions:** 20"-L 2.75"-H 2.5"-D**Watts:** 100**Voltage:** 9-48 VDC**Spot Beam:** 1100'L x 185'W**Weight:** 4.5 Lbs**Lighting Configuration:** 10° Spot or 35° Flood**Mounting:** Adjustable Hinge Style Bracket**Wiring:** 2 pin Deutsch plug**Amps:** 8.3 (on 12 volts) 4.2 (on 24 volts)**Lumens:** 9,000**LED Light Color:** 6300K**LED Life Expectancy:** 50,000 hours**Optics Efficiency:** 80%**Materials:** Aluminum Housing, Polycarbonate Lens**Housing Colors:** Black or White**Lux At The Lens:** 198,800**Lux At 1 Meter:** 24,800**CRI:** 70**CE Certified**[EN55015 EMI](#)[EN61547 EMS](#)[EN62471 Photobiological Safety](#)

3 year warranty replacement on this LED light. After 30 days, the customer ships the failed LED light and/or LED bulb to Larson Electronics' Magnalight at their expense. If the failure is a manufacturer defect, we will ship a new replacement to the customer. If failure occurs within 30 days of receipt, Larson Electronics Magnalight will provide a return label via email to the customer. When the failed light is returned, Magnalight will ship a new replacement.

Scroll Down to Purchase-**Part #: [LED10W-10R \(46762\)](#)****LED10W LED Features**

Seoul Z-Power 10 Watt LEDs

LEDs Driven At 80%

-40 C~ +80C Operating Temp Range

900 Lumens per LED

70% Lumen Retention @50,000 hours

IP67 Rated Waterproof to 1 meter

[Downlaod Spot and Flood Beam Specs](#)**Special Orders- Requirements**

Contact us for special requirements

Toll Free: 1-800-369-6671**Intl:** 1-903-498-3364**E-mail:** sales@magnalight.com



